


TR-300 EX

HYDRAULINEN
VAUNUALUSTAINEN
NOSTURI 30 t

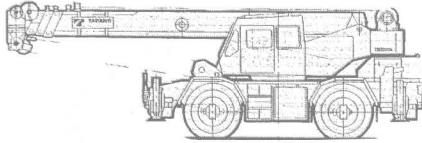


Nostokykytaulukko

vastapaino 27 t

m	puomin pituus										
	9,1 m	15,6 m	22,1 m	28,6 m	puomi- kulma	Ristikkojatke 7,2 m			Ristikkojatke 12,8 m		
						5°	25°	45°	5°	25°	45°
3,0	30,0	19,0			80°	3,0	2,0	1,4	2,0	1,0	0,65
3,5	25,0	19,2	12,5		75°	3,0	2,0	1,4	2,0	1,0	0,65
4,0	23,0	19,2	12,5	8,0	70°	2,9	2,0	1,4	1,65	1,0	0,65
4,5	21,2	18,1	12,5	8,0	65°	2,35	1,75	1,4	1,4	0,9	0,65
5,0	19,4	17,0	12,5	8,0	60°	1,95	1,5	1,35	1,2	0,85	0,65
5,5	17,9	15,8	12,0	8,0	55°	1,6	1,35	1,2	1,10	0,75	0,62
6,0	16,3	14,7	11,5	8,0	50°	1,35	1,2	1,1	0,9	0,7	0,6
6,5	15,1	13,8	11,0	8,0	45°	1,05	1,0	1,0	0,75	0,65	0,55
7,0		12,9	10,5	8,0	40°	0,85	0,8		0,65	0,55	
7,5		12,0	9,9	7,5	35°	0,6	0,6		0,45	0,4	
8,0		10,7	9,4	7,1	30°	0,45	0,45		0,35		
9,0		8,4	8,4	6,4	25°	0,35	0,35				
10,0		6,85	7,5	5,8							
11,0		5,6	6,4	5,35							
12,0		4,75	5,4	4,9							
13,0		4,05	4,6	4,55							
14,0			4,0	4,2							
15,0			3,45	3,85							
16,0			3,0	3,45							
17,0			2,65	3,05							
18,0			2,35	2,65							
19,0			2,05	2,4							
20,0				2,1							
22,0				1,7							
24,0				1,3							
26,0				1,0							

Nosturin ulottuvuudet

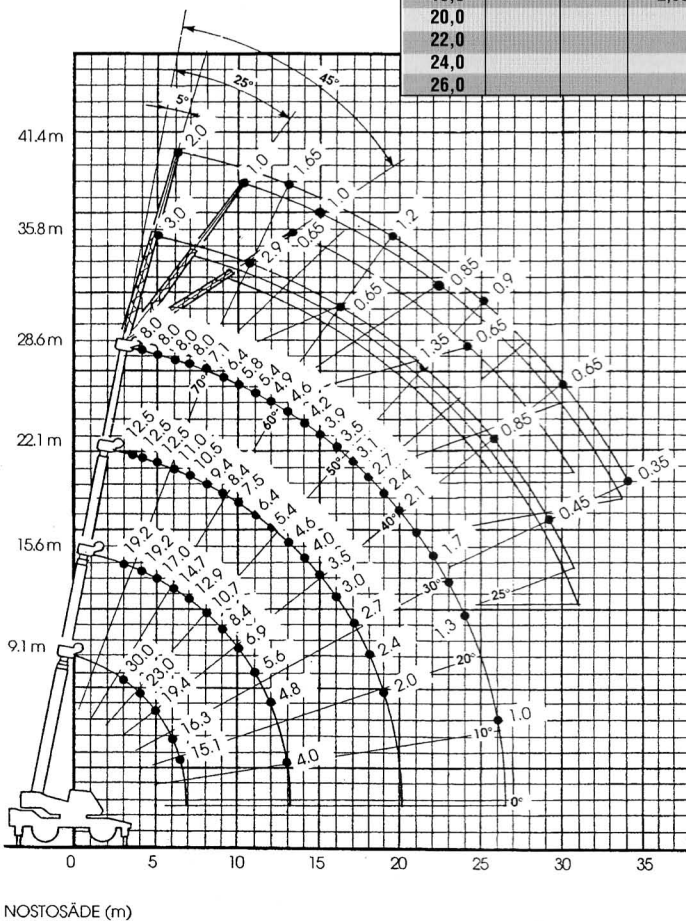

Nosturin päämitat

